

Induction
Flow 5 & H-Connect
ADVANCE 2022



FRECAN

Flow 5 & H-Connect - Advance 2022



Flow 5 range

Induction hobs with suction system Integrated Flow 5 thanks to their design, they produce a high-speed air flow that generates a great attraction effect for a kitchen without odours.

The new Flow 5 models are available in 3 and 4 zones, and with their bridge mode they allow cooking by creating large cooking areas.



H-Connect range ≡

The new range of Frecan hobs with H-Connect technology, allows you to control the hood from the cooktop easily thanks to its wireless connection.



Flow 5 - Advance 2022


FRECAN

Minimalist Silkscreen



Flow 5 hobs add elegance to your kitchen thanks to their discreet silkscreen that shows the minimum indications to locate the elements and the fully backlit control that is only displayed when the plate is in use.

High Speed Air Flow

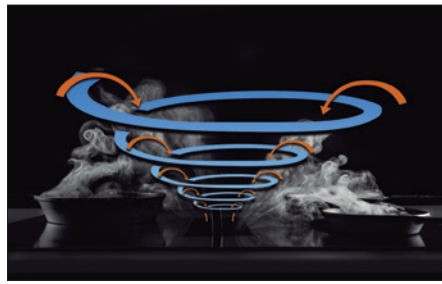

Thanks to its design, the Suction Zone of the Flow 5 produces a high-speed air flow generating an attraction effect that expands higher, attracting the fumes towards the center and bringing them inside.

Liquid Collection Tray




The Flow 5 surface hood has a fully removable fluid collection tray, with a useful capacity of 3.5 litres that prevents fluids from reaching the engine in the event of accidental spills.

Slider Control



Quick temperature selection with the slider: just touch the desired power level with a finger on the touch screen. The same happens with the suction zone, selecting the desired power.

Bridge

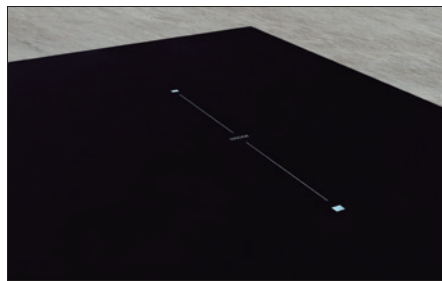

The hob allows you to associate two cooking zones to create a single zone where you can use large containers or cook several dishes at the same time, with maximum flexibility when placing the containers.

Power Boost

Our induction hobs have the Booster [P] function to increase the power of the selected zone. Specifically, when activating the Booster, the cooking zone operates for ten minutes at a very high power that allows large quantities of water to be quickly heated.

Quantity	Without Powerboost	With Powerboost
1 litre	2 minutes	50 seconds
3 litres	5 minutes	3 minutes
5 litres	8 minutes	5 minutes

Recall Function

This function allows you to call up the last settings selected in the previous cooking immediately.

Independent Timer

Minute-counter timer disconnected from the independent end of cooking programming for each zone.

Container Detection

Induction hobs recognize the presence of cookware and calculate the support surface. This system makes it possible to rationalize the use of energy. When the pot is removed, the cooking zone is automatically deactivated.

Stop&Go Function

Useful function that allows you to interrupt and resume set modes immediately if you need to pause cooking to do something else.

Heat Maintenance

It allows to maintain the temperature (70 ° C) of the food in a delicate way, without reaching boiling temperatures or burning the bottom of these.

Safety


Induction hobs have the most modern and sophisticated safety protections: centralized shutdown; security lock; residual heat indicators.

Timer Function

Programming using the touch-control knobs on the plate glass. Each zone, including the suction zone, has an independent programming to set different times.

Heat Function

Activates the zones at maximum power until reaching the selected power level to achieve the desired power in the shortest time.

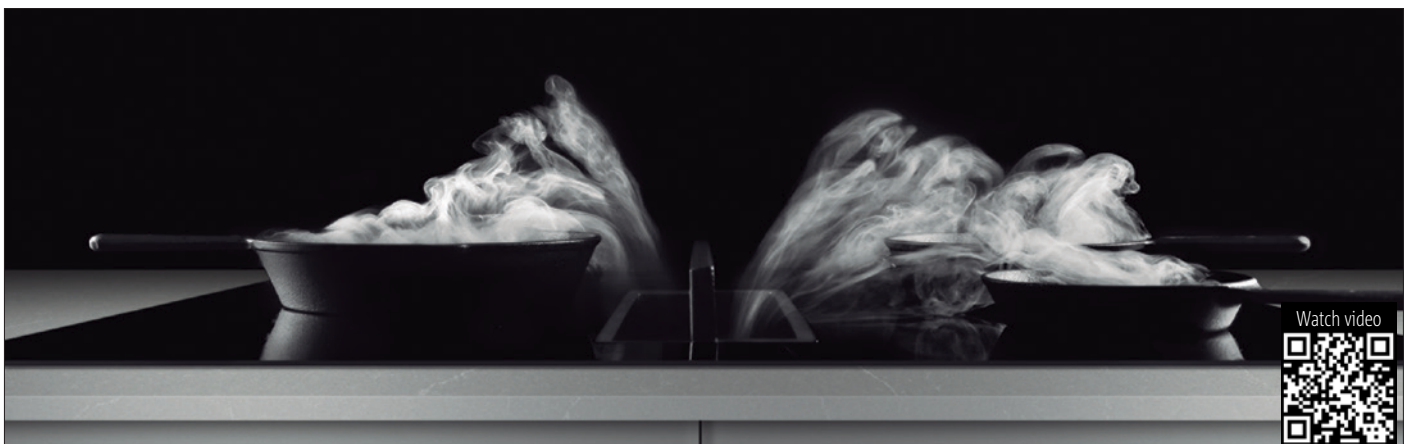

Flow 53 Slider Bridge



Description

- INDUCTION PANEL WITH 3 ZONES
- Total measurements: 780 x 520 x 200 mm.
- Cut-out measurements: 760 x 490 mm.

Cooking zones

- Left Ø250 mm. 2100 W. - Power Boost 3000 W.
- Rear Right 210x190 mm. 2100 W. - Power Boost 3000 W.
- Front Right 210x190 mm. 2100 W. - Power Boost 3000 W.
- **Maximum total power 6700 W.**

Suction zone

- Maximum power: 683,5 M3/h **A+++**
- Minimum sound level: 39,8 dB(A)
- Maximum sound level: 66,05 dB(A)

Versions | Prices

Finishing	Reference
Black	27250





Technical information

- Touch control with Slider
- 9 power levels in each zone
- Bridge function (Bridge in right area)
- Power Boost function
- Recall function
- Stop & Go function
- Timer function in each zone.
- Independent timer
- Keep warm function
- Heating function.
- Automatic container detection
- Residual heat indicator
- Security lock

Technical information suction

- 9 + 1 power levels
- Timer function (Delayed stop)
- Carbon filters included
- Filter saturation warning

Technical Design

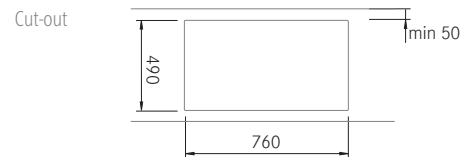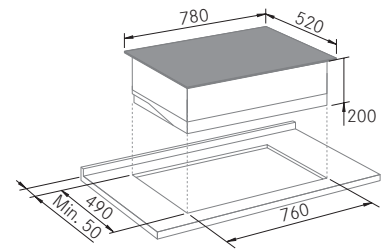

Flow 54 Slider Bridge



Description

- HOB WITH 4 COOKING ZONES
- Total measurements: 780 x 520 x 200 mm.
- Cut-out measurements: 760 x 490 mm.

Cooking zones

- Rear Left 210x190 mm. 2100 W. - Power Boost 3000 W.
- Front Left 210x190 mm. 2100 W. - Power Boost 3000 W.
- Rear Right 210x190 mm. 2100 W. - Power Boost 3000 W.
- Front Right 210x190 mm. 2100 W. - Power Boost 3000 W.
- **Maximum total power 6700 W.**

Suction zone

- Maximum power: 683,5 M3/h **A+++**
- Minimum sound level: 39,8 dB(A)
- Maximum sound level: 66,05 dB(A)

Versions | Prices

Finishing	Reference
Black	27251





Technical information

- Touch control with Slider
- 9 power levels in each zone
- Bridge function (Bridge in right area)
- Power Boost function
- Recall function
- Stop & Go function
- Timer function in each zone.
- Independent timer
- Keep warm function
- Heating function.
- Automatic container detection
- Residual heat indicator
- Security lock

Technical information suction

- 9 + 1 power levels
- Timer function (Delayed stop)
- Carbon filters included
- Filter saturation warning



Technical Design

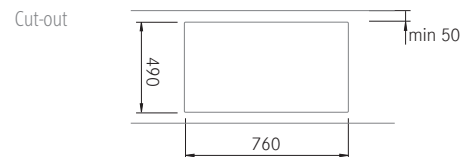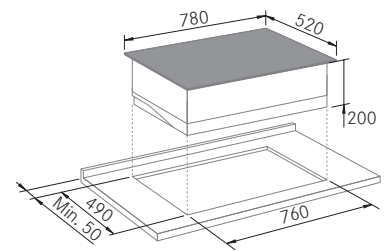

Box-R socle 60mm. (H5)

Reference: 90404


10 Cubes Helsa, More than 65000 parallel flow channels.



H-Connect - Advance 2022


FRECAN

H-Connect

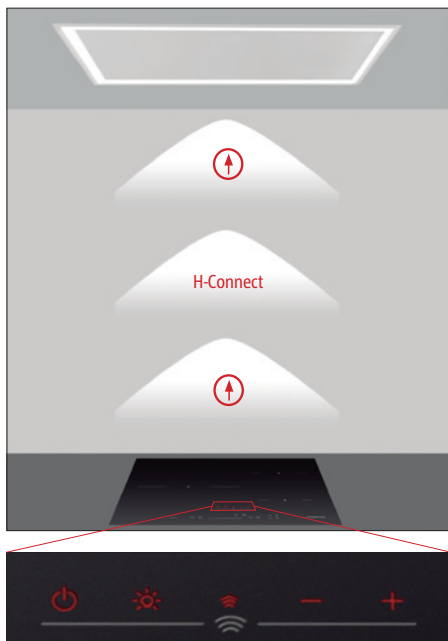

The H-Connect panels allow you to control all the functions of the compatible Frecan hood from a control located on the panel. In this way you can work more comfortably and safely without using the hood control.

Bridge Function - Extended Area

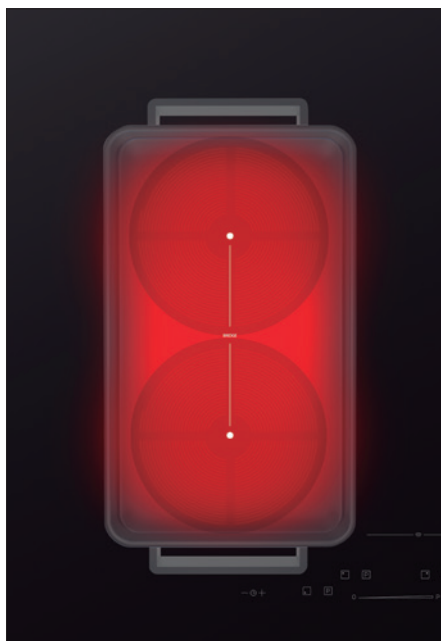

The hob allows you to associate two cooking zones to create a single zone where you can use large containers or cook several dishes at the same time, with maximum flexibility when placing the containers.

Pot Area 30 cm



The 3-zone cooking plates are equipped with a large double induction zone that allows the use of utensils with diameters between 11 and 30 cm. A very large area for the most demanding kitchen.

Compatible hoods	
Roof Models	Integration Models
Bright 360	Vetroklin
Sense 360	Note
Moon 360	GA Perimetral
Cloud 360	Soul
Cloud R	Quo
Ultralight	GAFile
Scl 360	GA
Nitro 360	Wall Models
Meet	Qfine
Aero	Stream (v.2022)
Nitro 2xr700	Island Models
SCL 2xr700	Qfine Isla

Power Boost

Our induction hobs have the Booster [P] function to increase the power of the selected zone. Specifically, when activating the Booster, the cooking zone operates for ten minutes at a very high power that allows large quantities of water to be quickly heated.

Quantity	Without Powerboost	With Powerboost
3 litres	5 minutes	3 minutes
5 litres	8 minutes	5 minutes

Slider Control



Quick temperature selection with the slider: just touch the desired power level with a finger on the touch screen.

ELC Control



The Easy Access Control on the ELC H-Connect offers easy operation with the most common features of a large induction hob.

Stop&Go Function

Useful function that allows you to interrupt and resume set modes immediately if you need to pause cooking to do something else.

Timer Function

Programming using the touch-control knobs on the plate glass. Each zone has an independent programming to set different cooking times.

Heat Maintenance

It allows to maintain the temperature (70 ° C) of the food in a delicate way, without reaching boiling temperatures or burning the bottom of these.

Heat Function

Activates the zones at maximum power until reaching the selected power level to achieve the desired power in the shortest time.

Container Detection


Induction hobs not only recognize the presence of vessels but also calculate the support surface. This system makes it possible to rationalize the use of energy. When the pot is removed, the cooking zone is automatically deactivated.

Safety

Induction hobs have the most modern and sophisticated safety protections: centralized shutdown; security lock; residual heat indicators.

Induction models also have the following functions: Safety System, which turns off the hob if no pots are detected; Overflow detector, which automatically shuts down the hob if liquids are spilled; automatic deactivation, to prevent accidents due to forgetfulness.

H-Connect 603 ELC



Description

- INDUCTION PANEL WITH 3 ZONES
- Total measurements: 590 x 520 x 63 mm.
- Embedding gap: 560 x 490 mm.

Cooking zones

- Left Ø300 mm. 2700 W. - Power Boost 3600 W. Double inductor with a min. of Ø11 cm. and maxi. of 30 cm.
- Rear Right Ø180 mm. 1500 W. - Power Boost 2000 W.
- Front Right Ø145 mm. 1200 W. - Power Boost 1600 W.
- **Maximum total power 7200 W.**

Versions | Prices

Finishing	Reference
Black	51148




Technical information


- **H-Connect controls (hood control)**
- Touch control
- 9 power levels in each zone
- Power Boost function
- Area for containers up to Ø30 cm.
- Timer function in each zone.
- Keep warm function
- Automatic container detection
- Residual heat indicator
- Security lock

Technical Design

Cut-out

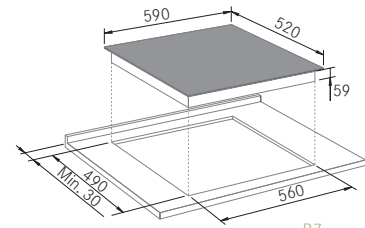

Flush



H-Connect 603 Slider



Description

- INDUCTION PANEL WITH 3 ZONES
- Total measurements: 590 x 520 x 63 mm.
- Embedding gap: 560 x 490 mm.

Cooking zones

- Left Ø300 mm. 2700 W. - Power Boost 3600 W. Double inductor with a min. of Ø11 cm. and maxi. of 30 cm.
- Rear Right Ø180 mm. 1500 W. - Power Boost 2000 W.
- Front Right Ø145 mm. 1200 W. - Power Boost 1600 W.
- **Maximum total power 7200 W.**

Versions | Prices

Finishing	Reference
Black	51149
White	51150




Technical information


- **H-Connect controls (hood control)**
- Touch control with Slider
- 9 power levels in each zone
- Power Boost function
- Area for containers up to Ø30 cm.
- Stop & Go function
- Timer function in each zone.
- Keep warm function
- Quick heating function.
- Automatic container detection
- Residual heat indicator
- Security lock

Technical Design

Cut-out

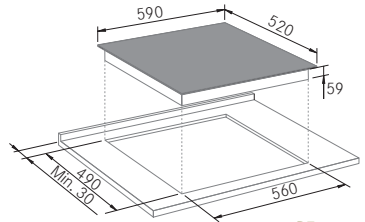

Flush



H-Connect 604 Slider Bridge



Available
March 2022

Description

- INDUCTION PANEL WITH 4 ZONES
- Total measurements: 590 x 520 x 63 mm.
- Embedding gap: 560 x 490 mm.

Cooking zones

- Rear Left Ø180 mm. 1500 W. - Power Boost 2000 W.
- Front Left Ø180 mm. 1500 W. - Power Boost 2000 W.
- Rear Right Ø210 mm. 1500 W. - Power Boost 2000 W.
- Front Right Ø145 mm. 1200 W. - Power Boost 1600 W.
- **Maximum total power 7200 W.**

Versions | Prices

Finishing	Reference
Black	51151




Technical information


- **H-Connect controls (hood control)**
- Touch control with Slider
- 9 power levels in each zone
- Power Boost function
- Bridge function (Bridge in Left area)
- Stop & Go function
- Timer function in each zone.
- Keep warm function
- Heating function.
- Automatic container detection
- Residual heat indicator
- Security lock

Technical Design

Cut-out

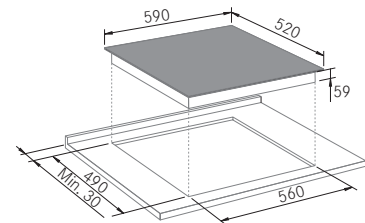

Flush





FRECAN

www.frecan.com

frecan,**AIR** frecan**TEK**